


Technical data:


- No. of contact: 15
- Termination method: Crimp termination
- Gender: Male
- Size: A10
- Conductor cross-section: 0.14 ... 2.5 mm²
- Rated current: 10A
- Rated voltage: 250V
- Rated impulse voltage: 4kV
- Pollution degree: 3
- Rated voltage acc.to UL: 600V
- Insulation resistance: ≥10¹⁰Ω
- Limiting temperature: -40 ... +125°C
- Material(insert): Polycarbonate
- Color(insert): RAL 7032(pebble grey)
- Mating cycles: ≥500
- Material flammability class acc. to UL94: V-0
- RoHS: Compliant
- Specifications: IEC61984, EN60664-1

技术数据:

- 针数: 15
- 接线方式: 冷压接针
- 公母类型: 公头
- 尺寸: A10
- 导体截面积: 0.14 ... 2.5 mm²
- 额定电流: 10A
- 额定电压: 250V
- 额定脉冲电压: 4kV
- 污染等级: 3
- 额定电压符合UL: 600V
- 绝缘阻抗: ≥10¹⁰Ω
- 极限温度: -40 ... +125°C
- 材料(插芯): 聚碳酸酯
- 颜色(插芯): RAL 7032(卵石灰)
- 插拔次数: ≥500
- 材料阻燃性等级符合UL94: V-0
- RoHS: 符合豁免标准
- 规格: IEC61984, EN60664-1

Panel cut out
面板开孔尺寸

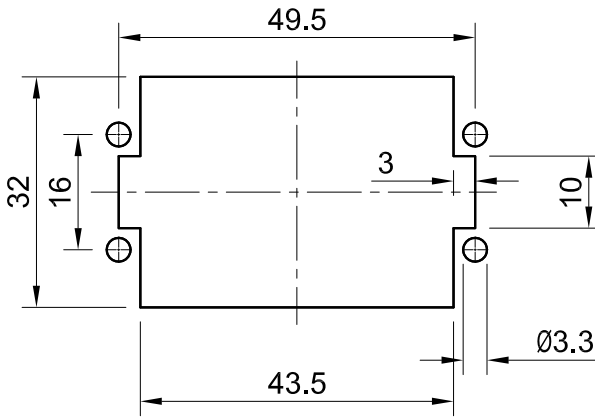

 InKonn (Suzhou) Electric Technology Co.,Ltd.	All Dimensions in mm Original Size DIN A4	Date 2019-05-14	Drawing No. TC9194989	Rev. A00	Scale 1:1
	Type Name ID-015-CM	Part No. 10 31 015 2100	Created by Shuxu Huang	Checked by Yiyi Luo	Page 1/1