




Panel cut out
面板开孔尺寸

Technical data:
 - No. of contact: 64
 - Termination method: Crimp termination
 - Gender: Male
 - Size: B24
 - Conductor cross-section: 0.14 ... 4 mm²
 - Rated current: 16A
 - Rated voltage: 500V
 - Rated impulse voltage: 6kV
 - Pollution degree: 3
 - Rated voltage acc.to UL: 600V
 - Insulation resistance: $\geq 10^4 \Omega$
 - Limiting temperature: -40 ... +125°C
 - Material(insert): Polycarbonate
 - Color(insert): RAL 7032(pebble grey)
 - Mating cycles: ≥ 500
 - Material flammability class acc. to UL94: V-0
 - RoHS: Compliant
 - Specifications: IEC61984, EN60664-1

技术数据:
 - 针数: 64
 - 接线方式: 冷压接针
 - 公母类型: 公头
 - 尺寸: B24
 - 导体截面积: 0.14 ... 4 mm²
 - 额定电流: 16A
 - 额定电压: 500V
 - 额定脉冲电压: 6kV
 - 污染等级: 3
 - 额定电压符合UL: 600V
 - 绝缘阻抗: $\geq 10^4 \Omega$
 - 极限温度: -40 ... +125°C
 - 材料(插芯): 聚碳酸酯
 - 颜色(插芯): RAL 7032 (卵石灰)
 - 插拔次数: ≥ 500
 - 材料阻燃性等级符合UL94: V-0
 - RoHS: 符合豁免标准
 - 规格: IEC61984, EN60664-1

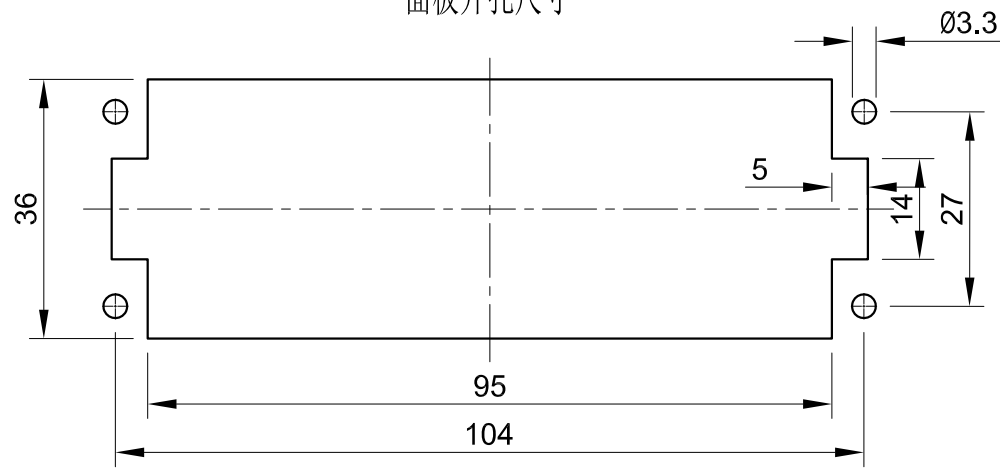

 InKonn (Suzhou) Electric Technology Co.,Ltd.	All Dimensions in mm Original Size DIN A4	Date 2019-6-5	Drawing No. TC3857005	Rev. A00	Scale 1:1
	Part No. 10 32 064 2100	Created by Shuxu Huang	Checked by Yiyi Luo	Type Name IEEE-064-CM	Page 1/1