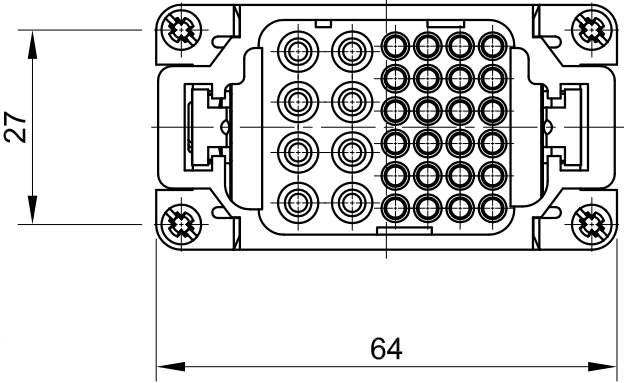
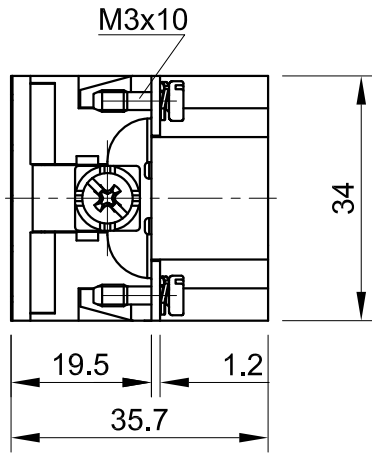
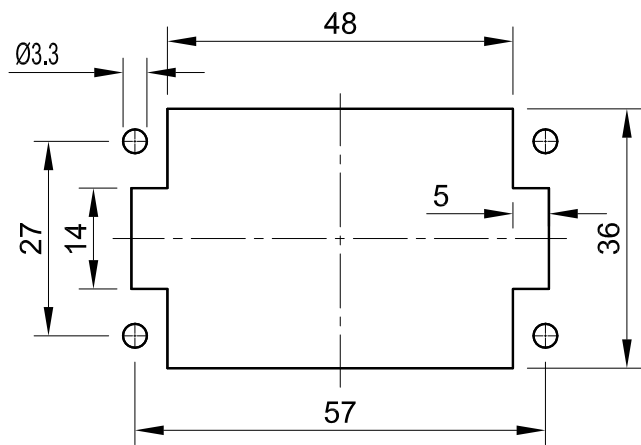

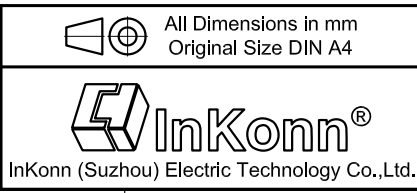


	1	2	3	4	5				
A	 						A		
B	<p>Technical data:</p> <ul style="list-style-type: none"> - No. of contact: 8 - Additional contacts: +24 signal contacts - Termination method: Crimp termination - Gender: Male - Size: B10 - Conductor cross-section: 0.14 ... 4 mm² - Rated current: 16A - Rated voltage(conductor-earth): 230V - Rated voltage(conductor-conductor): 400V - Rated impulse voltage: 4kV - Pollution degree: 3 - Rated current(signal): 10A - Rated voltage(signal): 160V - Rated impulse voltage(signal): 2.5kV - Pollution degree(signal): 3 - Rated current acc. to UL: 16A - Rated current acc. to UL(signal): 10A - Rated voltage acc. to UL: 600V - Rated voltage acc. to UL(signal): 600V - Insulation resistance: $\geq 10^{10}\Omega$ - Contact resistance: $\leq 3m\Omega, \leq 1m\Omega$ - Limiting temperature: -40 ... +125°C - Material(insert): Polycarbonate - Color(insert): RAL 7032(pebble grey) - Material(contacts): Copper alloy - Mating cycles: ≥ 500 - Material flammability class acc. to UL94: V-0 - RoHS: Compliant - Specifications: IEC61984, EN60664-1 		<p>技术数据:</p> <ul style="list-style-type: none"> - 针数: 8 - 额外插针: +24 信号端子 - 接线方式: 压接连接 - 公母类型: 公头 - 尺寸: B10 - 导体截面积: 0.14 ... 4 mm² - 额定电流: 16A - 额定电压(导体-接地): 230V - 额定电压(导体-导体): 400V - 额定脉冲电压: 4kV - 污染等级: 3 - 额定电流(信号): 10A - 额定电压(信号): 160V - 额定脉冲电压(信号): 2.5kV - 污染等级(信号): 3 - 额定电流符合UL: 16A - 额定电流符合UL(信号): 10A - 额定电压符合UL: 600V - 额定电压符合UL(信号): 600V - 绝缘阻抗: $\geq 10^{10}\Omega$ - 接触电阻: $\leq 3m\Omega, \leq 1m\Omega$ - 极限温度: -40 ... +125°C - 材料(插芯): 聚碳酸酯 - 颜色(插芯): RAL 7032(卵石灰) - 材料(插针): 铜合金 - 插拔次数: ≥ 500 - 材料阻燃性等级符合UL94: V-0 - RoHS: 符合豁免标准 - 规格: IEC61984, EN60664-1 		<p>Panel cut out 面板开孔尺寸</p> 			B	
C							C		
D					<p>Date 2019-6-5</p> <p>Part No. 10 37 032 2100</p> <p>Type Name IK-008/24-CM</p>	<p>Drawing No. TC4553417</p> <p>Created by Shuxu Huang</p>	<p>Rev. A00</p> <p>Checked by Yiyi Luo</p>	<p>Scale 1:1</p> <p>Page 1/1</p>	D
	1	2	3	4	5				