

A

A

B



B

C

C

D

D

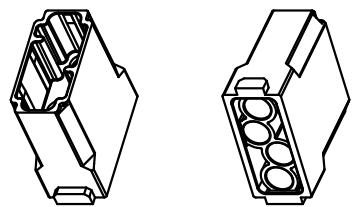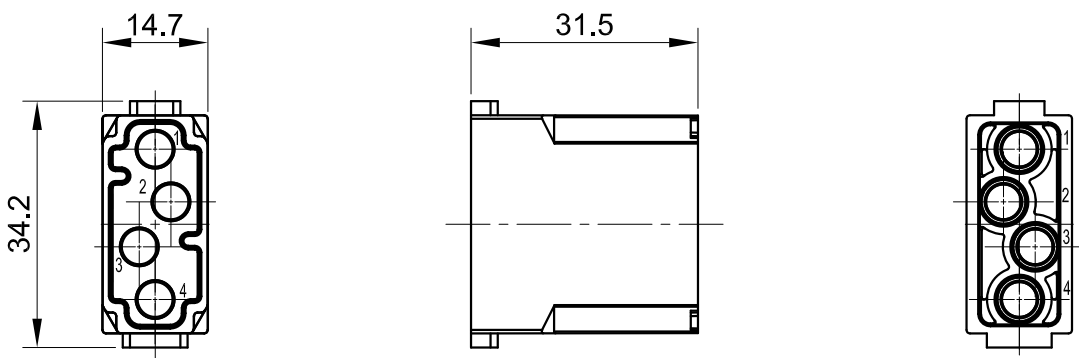


Technical data:

- No. of contact: 4
- Description: Multi-module
- Gender: Male
- Rated current: 1.5A
- Rated voltage: 50V
- Insulation resistance:  $\geq 10^{10}\Omega$
- Contact resistance:  $\leq 10m\Omega$
- Impedance: 50 $\Omega$ , 75 $\Omega$
- Limiting temperature: -40 ... +125 $^{\circ}C$
- Material(insert): Polycarbonate
- Color(insert): RAL 7032(pebble grey)
- Material(locking): Cooper alloy
- Material(contacts): Cooper alloy, PBFE/PBTB/PI
- Mating cycles:  $\geq 500$
- Material flammability class acc. to UL94: V-0
- RoHS: Compliant
- Specifications: IEC61984, EN60664-1

技术数据:

- 针数: 4
- 描述: 多模块
- 公母类型: 公头
- 额定电流: 1.5A
- 额定电压: 50V
- 绝缘阻抗:  $\geq 10^{10}\Omega$
- 接触电阻:  $\leq 10m\Omega$
- 电阻抗: 50 $\Omega$ , 75 $\Omega$
- 极限温度: -40 ... +125 $^{\circ}C$
- 材料(插芯): 聚碳酸酯
- 颜色(插芯): RAL 7032(卵石灰)
- 材料(插芯): 铜合金
- 材料(插芯): 铜合金, PBFE/PBTB/PI
- 插拔次数:  $\geq 500$
- 材料阻燃性等级符合UL94: V-0
- RoHS: 符合豁免标准
- 规格: IEC61984, EN60664-1

 InKonn (Suzhou) Electric Technology Co.,Ltd.	All Dimensions in mm Original Size DIN A4	Date 2022-4-19	Drawing No. TC0358090	Rev. A00	Scale 1:1
	Type Name IMM-004-CM	Part No. 10 38 004 2120	Created by Shuxu Huang	Checked by Yiyi Luo	Page 1/1