








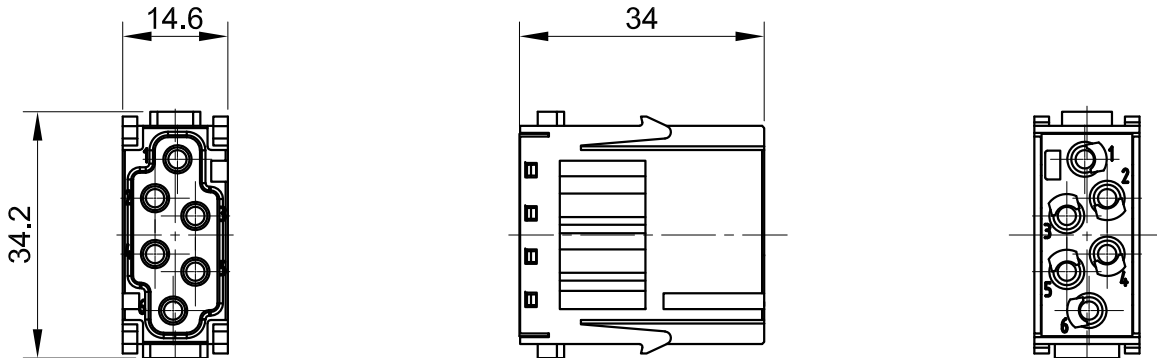

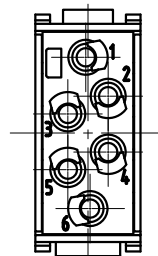

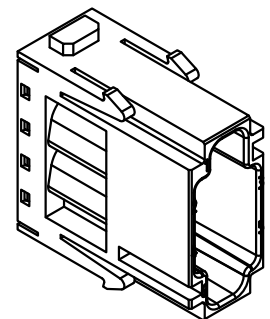



	1	2	3	4	5																			
A							A																	
B							B																	
C							C																	
D	<table border="0"> <tr> <td data-bbox="89 885 504 1556"> <p>Technical data:</p> <ul style="list-style-type: none"> - No. of contact: 6 - Termination method: Crimp termination - Gender: Male - Conductor cross-section: 0.14 ... 4 mm² - Rated current: 16A - Rated voltage: 500V - Rated impulse voltage: 6kV - Pollution degree: 3 - Rated voltage acc.to UL: 600V - Insulation resistance: ≥10¹⁰Ω - Limiting temperature: -40 ... +125°C - Material(insert): Polycarbonate - Color(insert): RAL 7032(pebble grey) - Mating cycles: ≥500 - Material flammability class acc. to UL94: V-0 - RoHS: Compliant - Specifications: IEC61984, EN60664-1 </td> <td data-bbox="504 885 985 1556"> <p>技术数据:</p> <ul style="list-style-type: none"> - 针数: 6 - 接线方式: 冷压接针 - 公母类型: 公头 - 导体截面积: 0.14 ... 4 mm² - 额定电流: 16A - 额定电压: 500V - 额定脉冲电压: 6kV - 污染等级: 3 - 额定电压符合UL: 600V - 绝缘阻抗: ≥10¹⁰Ω - 极限温度: -40 ... +125°C - 材料(插芯): 聚碳酸酯 - 颜色(插芯): RAL 7032(卵石灰) - 插拔次数: ≥500 - 材料阻燃性等级符合UL94: V-0 - RoHS: 符合豁免标准 - 规格: IEC61984, EN60664-1 </td> <td data-bbox="985 1332 1411 1556"> <table border="1"> <tr> <td data-bbox="985 1332 1411 1396">  All Dimensions in mm Original Size DIN A4 </td> <td data-bbox="1411 1332 1635 1396">Date 2022-4-19</td> <td data-bbox="1635 1332 1859 1396">Drawing No. TC9166204</td> <td data-bbox="1859 1332 2083 1396">Rev. A00</td> <td data-bbox="2083 1332 2184 1396">Scale 1:1</td> </tr> <tr> <td data-bbox="985 1396 1411 1556" rowspan="2">  InKonn (Suzhou) Electric Technology Co.,Ltd. </td> <td data-bbox="1411 1396 1635 1460">Part No. 10 38 006 2100</td> <td data-bbox="1635 1396 1859 1460">Created by Shuxu Huang</td> <td data-bbox="1859 1396 2083 1460">Checked by Yiyi Luo</td> <td data-bbox="2083 1396 2184 1460">Page 1/1</td> </tr> <tr> <td colspan="4" data-bbox="1411 1460 2184 1556"> Type Name IME-006-CM </td> </tr> </table> </td> </tr> </table>						<p>Technical data:</p> <ul style="list-style-type: none"> - No. of contact: 6 - Termination method: Crimp termination - Gender: Male - Conductor cross-section: 0.14 ... 4 mm² - Rated current: 16A - Rated voltage: 500V - Rated impulse voltage: 6kV - Pollution degree: 3 - Rated voltage acc.to UL: 600V - Insulation resistance: ≥10¹⁰Ω - Limiting temperature: -40 ... +125°C - Material(insert): Polycarbonate - Color(insert): RAL 7032(pebble grey) - Mating cycles: ≥500 - Material flammability class acc. to UL94: V-0 - RoHS: Compliant - Specifications: IEC61984, EN60664-1 	<p>技术数据:</p> <ul style="list-style-type: none"> - 针数: 6 - 接线方式: 冷压接针 - 公母类型: 公头 - 导体截面积: 0.14 ... 4 mm² - 额定电流: 16A - 额定电压: 500V - 额定脉冲电压: 6kV - 污染等级: 3 - 额定电压符合UL: 600V - 绝缘阻抗: ≥10¹⁰Ω - 极限温度: -40 ... +125°C - 材料(插芯): 聚碳酸酯 - 颜色(插芯): RAL 7032(卵石灰) - 插拔次数: ≥500 - 材料阻燃性等级符合UL94: V-0 - RoHS: 符合豁免标准 - 规格: IEC61984, EN60664-1 	<table border="1"> <tr> <td data-bbox="985 1332 1411 1396">  All Dimensions in mm Original Size DIN A4 </td> <td data-bbox="1411 1332 1635 1396">Date 2022-4-19</td> <td data-bbox="1635 1332 1859 1396">Drawing No. TC9166204</td> <td data-bbox="1859 1332 2083 1396">Rev. A00</td> <td data-bbox="2083 1332 2184 1396">Scale 1:1</td> </tr> <tr> <td data-bbox="985 1396 1411 1556" rowspan="2">  InKonn (Suzhou) Electric Technology Co.,Ltd. </td> <td data-bbox="1411 1396 1635 1460">Part No. 10 38 006 2100</td> <td data-bbox="1635 1396 1859 1460">Created by Shuxu Huang</td> <td data-bbox="1859 1396 2083 1460">Checked by Yiyi Luo</td> <td data-bbox="2083 1396 2184 1460">Page 1/1</td> </tr> <tr> <td colspan="4" data-bbox="1411 1460 2184 1556"> Type Name IME-006-CM </td> </tr> </table>	 All Dimensions in mm Original Size DIN A4	Date 2022-4-19	Drawing No. TC9166204	Rev. A00	Scale 1:1	 InKonn (Suzhou) Electric Technology Co.,Ltd.	Part No. 10 38 006 2100	Created by Shuxu Huang	Checked by Yiyi Luo	Page 1/1	Type Name IME-006-CM				D
<p>Technical data:</p> <ul style="list-style-type: none"> - No. of contact: 6 - Termination method: Crimp termination - Gender: Male - Conductor cross-section: 0.14 ... 4 mm² - Rated current: 16A - Rated voltage: 500V - Rated impulse voltage: 6kV - Pollution degree: 3 - Rated voltage acc.to UL: 600V - Insulation resistance: ≥10¹⁰Ω - Limiting temperature: -40 ... +125°C - Material(insert): Polycarbonate - Color(insert): RAL 7032(pebble grey) - Mating cycles: ≥500 - Material flammability class acc. to UL94: V-0 - RoHS: Compliant - Specifications: IEC61984, EN60664-1 	<p>技术数据:</p> <ul style="list-style-type: none"> - 针数: 6 - 接线方式: 冷压接针 - 公母类型: 公头 - 导体截面积: 0.14 ... 4 mm² - 额定电流: 16A - 额定电压: 500V - 额定脉冲电压: 6kV - 污染等级: 3 - 额定电压符合UL: 600V - 绝缘阻抗: ≥10¹⁰Ω - 极限温度: -40 ... +125°C - 材料(插芯): 聚碳酸酯 - 颜色(插芯): RAL 7032(卵石灰) - 插拔次数: ≥500 - 材料阻燃性等级符合UL94: V-0 - RoHS: 符合豁免标准 - 规格: IEC61984, EN60664-1 	<table border="1"> <tr> <td data-bbox="985 1332 1411 1396">  All Dimensions in mm Original Size DIN A4 </td> <td data-bbox="1411 1332 1635 1396">Date 2022-4-19</td> <td data-bbox="1635 1332 1859 1396">Drawing No. TC9166204</td> <td data-bbox="1859 1332 2083 1396">Rev. A00</td> <td data-bbox="2083 1332 2184 1396">Scale 1:1</td> </tr> <tr> <td data-bbox="985 1396 1411 1556" rowspan="2">  InKonn (Suzhou) Electric Technology Co.,Ltd. </td> <td data-bbox="1411 1396 1635 1460">Part No. 10 38 006 2100</td> <td data-bbox="1635 1396 1859 1460">Created by Shuxu Huang</td> <td data-bbox="1859 1396 2083 1460">Checked by Yiyi Luo</td> <td data-bbox="2083 1396 2184 1460">Page 1/1</td> </tr> <tr> <td colspan="4" data-bbox="1411 1460 2184 1556"> Type Name IME-006-CM </td> </tr> </table>	 All Dimensions in mm Original Size DIN A4	Date 2022-4-19	Drawing No. TC9166204	Rev. A00	Scale 1:1	 InKonn (Suzhou) Electric Technology Co.,Ltd.	Part No. 10 38 006 2100	Created by Shuxu Huang	Checked by Yiyi Luo	Page 1/1	Type Name IME-006-CM											
 All Dimensions in mm Original Size DIN A4	Date 2022-4-19	Drawing No. TC9166204	Rev. A00	Scale 1:1																				
 InKonn (Suzhou) Electric Technology Co.,Ltd.	Part No. 10 38 006 2100	Created by Shuxu Huang	Checked by Yiyi Luo	Page 1/1																				
	Type Name IME-006-CM																							
	1	2	3	4	5																			